

Terberg KingLifter BV manufactures truck-mounted forklifts in a wide range of different models under the name KingLifter. The feature of these high quality machines is that all models boast an exceptionally good lifting capacity-low unladen weight ratio. Professional users will certainly appreciate how valuable this feature is.

The KingLifter MC model combines the best of the compact S model and the versatile M model. When manoeuvre space is limited, a powerful drive and a lifting capacity of 2,500 kg are required, the MC model is the right machine for the job.

There is an option of having a 31 or 38 hp direct injection diesel engine, 1-wheel or 3-wheel drive, 4-way steering, duplo glide mast or Terberg's patented duplo roller mast with a lifting capacity of 2,000 or 2,500 kg and featuring a lifting height of 2,200 to 4,050 mm, fixed or retractable legs, a range of fork and wheel variants and many extra options.

In short, there is a Terberg KingLifter model M to suit your own specific application needs.

It is important for your company's image that a truck-mounted forklift retains its good looks. This also comes into play as far as residual value is concerned. Consequently, Terberg devoted particular attention to optimum anti-corrosion protection.

The frame, the lifting mast and other steel sections are finished with a CDP base layer and powder coating. The plating is made of stainless steel. The legs which are always susceptible to damage in use are hot-dip galvanised. The legs of the 4-way machines are finished with a CDP base layers and powder coating.

All models are equipped with work lights, beacon lamp, parking brake and power steering.



# MODEL TKL-MC

TECHNICAL INFORMATION



## Model TKL-MC


Area of application:

- Agricultural sector
- Industry
- Building materials, e.g. transporting wood insulation materials, window frames and doors
- Gas industry
- Recycling



The driver is seated completely within the contours of the machine to ensure operating safety.

The engine compartment is easily accessible thanks to the large revolving door. This makes it a lot easier to perform an oil level check and carry out service work.



## Duplo Glide mast with Reachfork

- CDP base layer and powder coating
- Lifting capacity of 2,000 or 2,500 kg
- Lifting height of 2,200 to 4,050 mm





## Duplo Roller mast with scissor system

- Terberg patented
- Open view
- Lighter
- Faster

## 4-Way

- Advanced side loader
- Trouble-free manoeuvring in a small space
- Optimum power transmission
- Good terrain handling

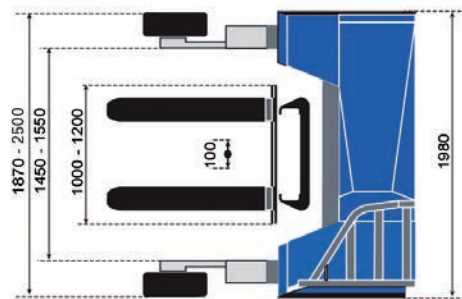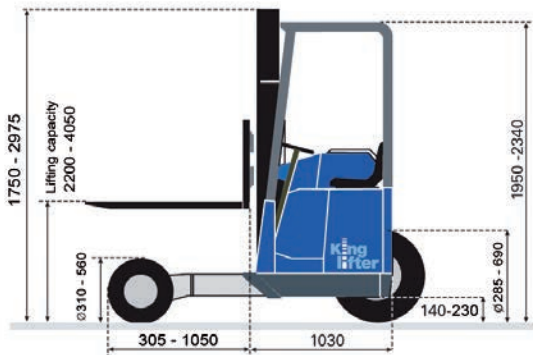

TKL-MC					
	1x3	3x3		3x3 4W	
lifting mast	DGR	DGR	DRS	DGR	DRS
engine	31 hp/38 hp	31 hp/38 hp	31 hp/38 hp	31 hp/38 hp	31 hp/38 hp
drive	1 wheel	3 wheel	3 wheel	3 wheel, 4-way	3 wheel, 4 way
lifting capacity	2,000 kg @ 600mm LC	2,000 kg @ 600mm LC	2,500 kg @ 600mm LC	2,000 kg @ 600mm LC	2,500 kg @ 600mm LC
standard front wheel	140/55	18x7-8	18x7-8	23x8.5-12	23x8.5-12
standard rear wheel	27x10-12	27x10-12	27x10-12	27x10-12	27x10-12
unladen weight*	1,620 kg	1,770 kg	2,090 kg	1,950 kg	2,270 kg

\* varies according to machine specification

**King Lifter** Terberg KingLifter B.V. | Baronieweg 23a | 3403 NL IJsselstein | The Netherlands  
 Tel.: +31 (0)30 2219070 | Fax: +31 (0)30 2219071 | Email: info@terbergkinglifter.eu

Specifications and illustrations are subject to change; no rights may be derived from the illustrations and specifications provided.  
 The specifications may be amended without prior notice.