




LOGITRANS

EHS INOX / EHSS INOX

60 years experience with
LIFTING PERFORMANCE

logitrans.com

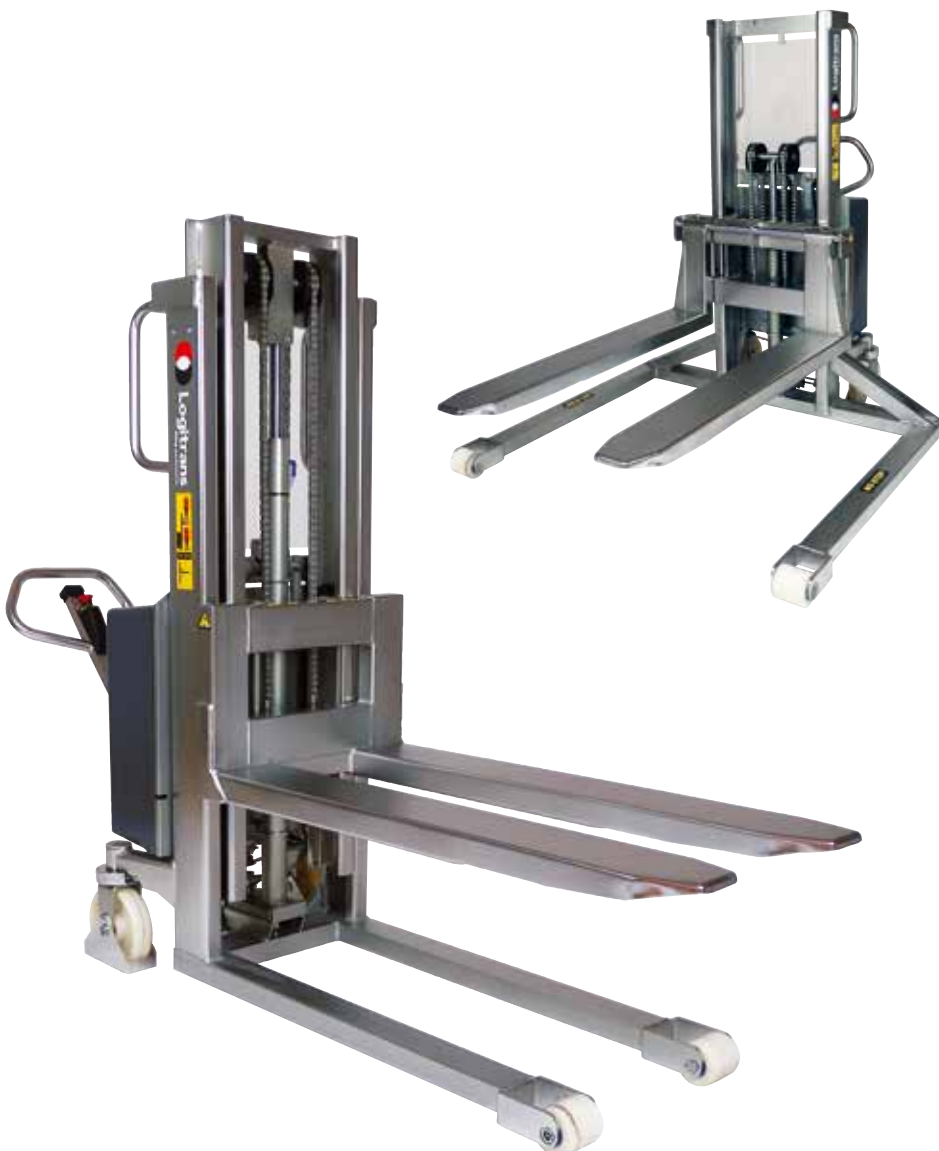

Stainless electric stacker - hygienic handling of goods

The stainless electric stacker minimises the risk of bacterial contamination. It is designed for environments with high focus on hygiene and cleanability on the surfaces being in direct contact with the goods to be handled, e.g. meat, fish or medicine.

Also the ergonomic working conditions of the user is in focus, e.g. the ergonomically correct handle, ensuring the user a relaxed hold. At the same time, it is easy and quick to lift and lower the forks. The stainless stacker with straddle legs (EHSSI) can handle many different pallet types, also closed pallets.

The electric stainless stacker can be provided with remote control, so that all functions can be controlled from the side line. This gives the user full freedom of action.

LOGITRANS


EHS INOX / EHSS INOX

Hygiene

- Acid-resistant and electric polished fork chassis (AISI 316L)
- Closed forks
- Easy to clean

Safety

- Central location of all control buttons on handle
- Transparent and impact-resistant safety screen

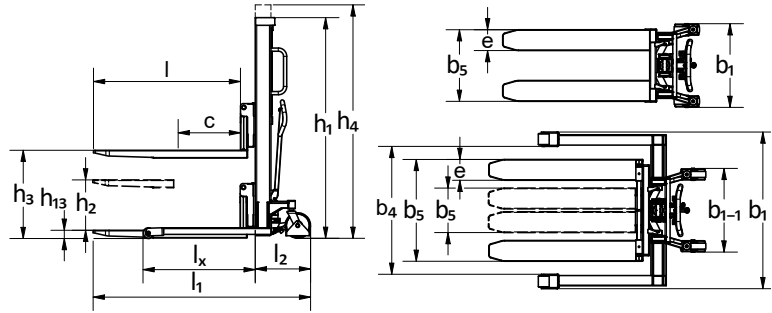

The ergonomically correct handle ensures the user a relaxed hold.



Closed forks mean easy cleaning and few hiding places for bacteria.



Also available with electric lifting or as explosion proof (manual model).



The stainless stacker with straddle legs can handle many different pallet types, also closed pallets.

Product (measured in mm)	EHS1000							EHSS1000					
	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000
Capacity in kg	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000
Lifting height	h ₃	1200	1400	1600	2050	2450	2850	1170	1370	1570	2020	2420	2820
Fork length	l	1150						1150					
Overall height	h ₁	1530	1730	1930	1530	1730	1930	1530	1730	1930	1530	1730	1930
Wheel span – external	b ₁₋₁	b ₁						670					
Overall width	b ₁	670					930	b ₄ + 225					
Fork span	b ₅	560					350/800						
Length without forks	l ₂	500					550						
Overall length by 1150 forks	l ₁	1715				1725		1815					
Overall height	h ₄	Without telescopic mast			2490	2890	3290	Without telescopic mast		2490	2890	3290	
Lowered height	h ₁₃	90					65						
Load centre	c	max. 600					max. 600						
Width between legs	b ₄	-					435-1250 not adjustable						
Fork width	e	163					163						
Run-in length	l _x	1005					1005						
Gangway (pallet: 1200 x 800)	A _{st}	2200*					2435						
Free lift	h ₂	-			190		-			190			
Turning angle of the wheels		180°					180°						
Pump motor		1,1 kW 12 V					1,1 kW 12 V						
Lifting speed irrespective of load		0,07 m/s					0,07 m/s						
Lowering speed irrespective of load		0,08 m/s					0,08 m/s						
Weight in kg (uden batteri)		218	222	226	283	292	302	-					

* Tests show that 1530 mm are enough.